

# AV2100

## 2 Megapixel IP-camera

**Arecont Vision**  
megapixel technology...  
beyond imagination

AV2100M (Color)

AV2100DN (Day/Night)

AV2100-AI (Color Auto-Iris)



*AV2100 Series network camera delivers full motion progressive scan 1600 x 1200 video at 24 fps featuring massively-parallel MegaVideo® image processing architecture capable of sustaining over 6 billion operations per second.*

### Arecont Vision Advantages:

#### Superior Low Light Performance

- 1/2" CMOS Sensor

#### Unparalleled High Definition Resolution - 1600-1200

- Six times the resolution of IP VGA or analog cameras

#### Fastest MegaPixel Image Rates

- Up to 24fps in 2 megapixel mode

#### Forensic Zooming

- Zoom live or after-event while recording full field of view in HD ... replace PTZ devices

#### Reduced Overall System Cost

- Less cameras to install, less wiring, no external power (POE), less NVR licensing fees

#### Cost Efficiency

- Comparable cost to IP VGA & analog cameras

#### Programmable 1/4 Resolution

- Can be initiated by motion detection or alarm inputs

#### Other key features:

- Simultaneous full field of view and Region-of-Interest (ROI)
- Image cropping allows streaming of full density partial images
- On-camera motion detection
- Motorized IR Cut Filter with focus shift correction (DN Version) and more

*H.264 versions are also available*

MegaVideo® Series

Learn more about our products at [www.arecontvision.com](http://www.arecontvision.com)

[www.arecontvision.com](http://www.arecontvision.com)

[avsales@arecontvision.com](mailto:avsales@arecontvision.com)

818.937.0700 877.CAMERA.8

## Model Numbers:

- AV2100M - Color
- AV2100-AI - Color Auto-Iris
- AV2100DN - Day/Night

## Imaging

- 2 megapixel CMOS image sensor
- 1600(H) x 1200(V) pixel array
- 1/2" optical format
- 4.2 μm pixel pitch
- Bayer mosaic RGB filter
- Minimum illumination of:
  - Color: 0.1 Lux @ F1.4
  - Day/Night: 0 Lux, IR sensitive
- Dynamic range 60 dB
- Maximum SNR 45 dB

## Full Field of View (FOV) Resolutions

- 1600x1200 (HxW) 2 megapixel
- 800x600 (HxW) 1/4 resolution

## Cropped Field of View Resolutions

- 1280x1024 1.3 MP
- 1280x720 HDTV - 720p
- 1024x768 XGA
- 800x600 SVGA
- 704x570 PAL
- 704x480 NTSC
- 640x480 VGA
- 352x288 CIF
- 320x240 SIF

## Data Transmission

- Data rate up to 55Mbps
- Video frame rate up to:
  - 24fps @ 1600x1200
  - 30fps @ 1280x1024
- Motion JPEG with 21 levels of quality
- TFTP and HTTP image transmission protocols
- 100Base-T Ethernet Network Interface

## Programmability

- Auto Exposure (AE) and Gain Control (AGC) >120dB
- On-camera motion detection with 64 detection zones
- Auto backlight compensation
- Auto multi-matrix white balance
- 50/60Hz selectable flicker control
- Electronic pan, tilt, zoom (PTZ)
- Electronic image rotation - 180° flip
- Resolution windowing down to 32x32 pixels
- Programmable shutter to minimize motion blurring for low-light mode
- MoonLight™ mode extended exposure and proprietary noise cancellation
- Programmable resolution, brightness, saturation, gamma, sharpness, tint
- Picture-in-Picture: simultaneous delivery of full field of view and zoomed images
- Bandwidth & storage savings by running at 1/4 resolution

## Electrical

- Opto-coupled alarm or trigger input, opto-coupled alarm and flash sync output
- Power Over Ethernet (PoE): PoE 802.3af
- DC input: auxiliary 15V-48V DC
- Power consumption 3 Watts maximum
- Optional DC AI connection (AV2100 - AI)

## Regulatory Approvals


- FCC and CE compliant

## Environmental

- Operating temperature 0°C (32 °F) to +50°C (122 °F)
- Storage temperature -20°C (-4 °F) to +60°C (140 °F)
- Humidity 0% to 90% (non condensing)

## Mechanical

- 3"W (76 mm) x 2.5"H (63.5 mm) x 2.25"D (57mm) (w/o lens)
- 8.6 oz (243 grams) (w/o lens)
- C/CS lens mount

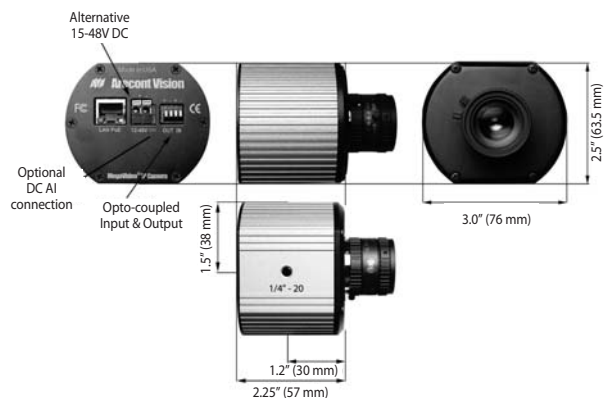

## H.264 versions available:

(see H.264 specification sheets for more information)

- AV2105
- AV2105 - AI
- AV2105DN

## Housing Accessories:

- Dome 4-I - Indoor 4" Vandal Dome
- Dome 5-I - Indoor 5" Recessed Dome

## Lenses:

H0514-MP 5mm MP Lens	M1614-MP 16mm MP Lens	LENS4-10 4-10mm MP Varifocal Lens
LENS 6.0 6mm MP Lens	M2514-MP 25mm MP Lens	LENS4-13 4.5-13mm MP Varifocal IR Lens
M0814-MP 8mm MP Lens	15M5018-MP 50mm MP Lens	* Other megapixel lenses are also available
M1214-MP 12mm MP Lens		

**Arecont Vision**  
megapixel technology...  
**beyond imagination**